


RÉSEAU
GN
GPL



TUYAU FLEXIPIPE

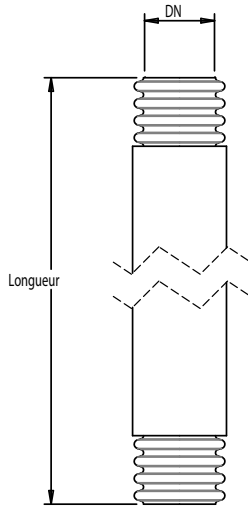

CARACTÉRISTIQUES TECHNIQUES

Normes : CCH 2007-01 / XP E 29-826

Température : -20°C à +60°C

DN	LONGUEUR	CONDITIONNEMENT	PRESSIION D'UTILISATION JUSQU'À	ATG	RÉF.
10	15 m	Carton	2 bar	x	1001015
10	30 m	Carton	2 bar	x	1001030
10	75 m	Touret	2 bar	x	1001075
15	15 m	Carton	2 bar	x	1001515
15	30 m	Carton	2 bar	x	1001530
15	75 m	Touret	2 bar	x	1001575
20	15 m	Carton	2 bar	x	1002015
20	30 m	Carton	2 bar	x	1002030
20	75 m	Touret	2 bar	x	1002075
20	110 m	Touret	2 bar	x	10020110
20	300 m	Touret	2 bar	x	10020300
25	15 m	Carton	2 bar	x	1002515
25	30 m	Carton	2 bar	x	1002530
25	75 m	Touret	2 bar	x	1002575
32	15 m	Couronne	0,5 bar	x	1003215
32	30 m	Couronne	0,5 bar	x	1003230
32	75 m	Touret	0,5 bar	x	1003275

TUYAU FLEXIPIPE

DN	LONGUEUR	CONDITIONNEMENT	PRESSION D'UTILISATION JUSQU'À	ATG	RÉF.
40	15 m	Couronne	0,5 bar	x	1004015
40	30 m	Couronne	0,5 bar	x	1004030
40	75 m	Touret	0,5 bar	x	1004075
50	15 m	Couronne	0,5 bar	x	1005015
50	30 m	Couronne	0,5 bar	x	1005030
50	50 m	Touret	0,5 bar	x	1005050